



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 177 330 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: 19.06.91 (51) Int. Cl.⁵: **A61M 29/00**

(21) Application number: **85307008.4**

(22) Date of filing: **01.10.85**

(54) **Percutaneous endovascular stent.**

(30) Priority: **01.10.84 US 656261**

(43) Date of publication of application:
09.04.86 Bulletin 86/15

(45) Publication of the grant of the patent:
19.06.91 Bulletin 91/25

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

(56) References cited:
DE-C- 150 127 FR-A- 1 602 513
FR-A- 2 464 429 US-A- 1 672 591
US-A- 3 868 956 US-A- 4 214 587
US-A- 4 425 908

(73) Proprietor: **Cook Incorporated**
925 South Curry Pike P.O. Box 489
Bloomington Indiana 47402(US)

(72) Inventor: **Glanturco, Cesare**
2208 Valley Brook Drive, Champaign
Illinois 61821(US)

(74) Representative: **Bannerman, David Gardner et**
al
Withers & Rogers 4 Dyer's Buildings Holborn
London, EC1N 2JT(GB)

EP 0 177 330 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 177 330 B1

Description

This invention relates to stents. It is desirable in various situations that means be provided for expanding a constricted vessel portion or for maintaining an open passageway through a vessel portion. Such situations arise, for example, in conjunction with the disease known as arteriosclerosis as well as the growth of a tumor so as to restrict or stop flow of blood through a blood vessel. Dr. Charles Dotter et al. reported in 1969 on the experimental use of coiled stainless steel wire stents placed in the popliteal arteries of dogs. Although the coils exhibited long-term patency, narrowing of the lumen occurred within them and only small coils could be passed percutaneously. See Dotter CT et al., Transluminally-Placed Coilspring Endoarterial Tube Grafts, Invest. Radiol., 1969; 4:329-332¹. Recently, two laboratories reported on the use of a prosthesis constructed of a thermal shape memory alloy, nitinol, which is passed through a catheter. See Dotter CT et al., Transluminal Expandable Nitinol Coil Stent Grafting, Radiology, April, 1983; 147:259-260², and Cragg A. et al., Nonsurgical Placement of Arterial Endoprostheses, Radiology, April, 1983; 147:261-263³. Such stents can be complicated to use, requiring ice water or heated saline for placement. Also they have been found to produce luminal narrowing due to fibrin deposition on the stent wires.

Other references which may have relevance to the present invention are the following U.S. patents: Sakura 4,214,587; Alfidi 3,868,956; and Simon 4,425,908; and the Russian patent 978,821; also the following publications: C. Gianturco et al., A new vena cava filter: experimental animal evaluation, Radiology, December, 1980; 137: 835-837⁴; and M. Simon et al., A Vena Cava Filter Using Thermal Shape Memory Alloy, Diagnostic Radiology, 125:89-94, October 1977⁵. Still another reference publication is D. Maass et al., Radiology Follow-up of Transluminally Inserted Vascular Endoprostheses: An Experimental Study Using Expanding Spirals, Radiology, September, 1984; 152: 659-663.

US-A-1672591 relates to a resilient nostril dilator formed from a single length of wire bent into a configuration consisting of a number of bends joined by straight sections.

DE-C-150127 describes a dilator for the uterus consisting of a plurality of rods hinged together in a closed zig-zag configuration and expandible by an external actuating means.

Objects of the invention are to provide a stent which is easy to place and use and that reduces flow defects, luminal narrowing and occlusion.

This invention provides a stent comprising a single length of wire formed into a closed zig-zag configuration consisting of an endless series of straight sections joined by a plurality of bends, wherein the stent is resiliently depressible into a smaller first shape in which all of the straight sections are arranged side-by-side and closely adjacent one another for insertion into a passageway with the bends having a stress therein, and wherein the stent is resiliently expandable by release of said stress into a second shape in which all of the straight sections define a generally circular or cylindrical configuration for pressing against the wall of the passageway to maintain it open.

We also provide a combination of such a stent and a tubular cartridge having said stent therein, said stent being resiliently depressed into said smaller first shape.

This combination may additionally comprise a sheath having a lumen therethrough, said sheath having an adapter recess arranged coaxially with said lumen and enlarged in size relative to said lumen, and flexible member having a closed end and having an outer size sufficiently small to fit within said sheath yet sufficiently large to push said stent out of said sheath.

The wire is preferably of stainless steel with an O.D. of 0.046 cm (0.018 inches). In its second shape the stent is preferably either 5.5cm long and 4 cm in diameter, or 3.0 cm long and 2.5 cm in diameter.

The bends are preferably relatively sharp and are at a radius of preferably no more than 0.2 cm.

Stents embodying the invention and uses to which they may be put will now be described by way of example and with reference to the accompanying drawings, in which:

FIG. 1 is a side elevation of a preferred embodiment of the present invention.

FIG. 2 is an end elevation of the structure of FIG. 1.

FIG. 3 is a section through a blood vessel showing a tumor reducing the size of the blood vessel.

FIG. 4 is a view similar to FIG. 3 showing one of the steps of the method of inserting the stent of the present invention.

FIGS. 5 and 6 are serial views showing further steps in the method illustrated in FIG. 4.

FIG. 7 is a view similar to FIG. 6 showing three stents having been placed in the blood vessel in accord with another embodiment of the invention.

FIG. 8 is a view similar to FIGS. 6 and 7 showing four stents being placed in a blood vessel in overlapping fashion, in accordance with a further embodiment of the method of the present invention.

FIG. 9 is a side elevation of a sheath used in the method of inserting the stent of the present invention.

FIG. 10 is a sectional view of the proximal end of the sheath showing the stent being placed into the

EP 0 177 330 B1

sheath as a part of the method of inserting the stent of the present invention.

Referring now more particularly to the drawings, there is illustrated in FIG. 1 a side elevation of a preferred embodiment of the stent 9 of the present invention which includes a length 10 of stainless steel wire formed in a closed zig-zag configuration. The wire is closed by a sleeve 11 which is welded to or
5 tightly squeezed against the ends of the wire to produce the endless configuration. Referring to FIG. 4, the stent is shown in a resiliently compressed first shape wherein the straight sections 12 are arranged side-by-side and closely adjacent one another.

The straight sections 12 of the stent are joined by bends 13 which are relatively sharp. Thus, in one specific embodiment of the invention, the bends 13 are at a radius of no more than 0.2 cm. This specific
10 embodiment of the invention includes wire 10 which is stainless steel of 0.046 cm (0.018 inches) O.D. The stent is resiliently expandable from the compressed first shape of FIG. 4 into a second shape illustrated in FIGS. 1, 2 and 6, wherein the straight sections 12 press against the walls of passageway to maintain the passageway open. FIG. 2 shows the end view of the stent in its expanded second shape. As illustrated in FIG. 2, the stent has generally a circular configuration or a cylindrical configuration when it is in its second
15 expanded shape.

In order to practice the method of inserting the stent of this invention, the stent is compressed into the first shape illustrated in FIG. 10 and is placed within a tubular cartridge 15 (FIG. 10). The cartridge 15 is inserted into the recess 16 in the adapter 17 of the sheath 20. The stent is then advanced through the sheath 20 by means of a flat-ended pusher 21. Thus in one specific embodiment of the invention, the flat-
20 ended pusher was made of 8 French polyethylene tubing, although a flat-ended flexible metal rod is preferred. When the stent 10 reaches the end of the sheath as shown in FIG. 4, the flat-ended pusher is held while the sheath is withdrawn as shown in FIG. 5. This frees the stent, allowing it to expand and hug the vessel wall as shown in FIG. 6. If desired and if necessary for the particular situation, further stents can be added and can be placed in the blood vessel in the same fashion as above described. Thus in FIG. 7, an
25 additional two stents are located one longitudinally of the first stent in the blood vessel and the other overlapping the first stent while in FIG. 8, four overlapping stents are used.

In tests of the invention, endovascular stents were designed and built in two sizes (5.5 cm long x 4 cm diameter fully expanded; 3.0 cm long x 2.5 cm diameter fully expanded) from stainless steel wire 0.046 cm (0.018 inches) formed in a zig-zag pattern. They were placed for varying periods of time in the jugular vein,
30 inferior vena cava and abdominal aorta of five dogs (see Table I below) and evaluated with regard to ease of use, dilating force, migration, patency, thrombogenicity, and local vascular changes.

Five adult, mongrel dogs (18-27 kg) were used in the study. They were anesthetized with i.v. sodium pentobarbital (Nembutal; 30 mg/kg) and the jugular vein, femoral vein, and femoral artery were surgically isolated. An incision was made in the vessels and a 8 French Teflon sheath containing an 8 French Teflon
35 catheter with a taper-tip was inserted and under fluoroscopic monitoring advanced just beyond the area of interest. The stent was compressed and placed within a Teflon cartridge which fits inside the adaptor of the 8 French sheath. The 8 French catheter was removed, the cartridge was placed in the sheath adaptor, and the stent was advanced through the sheath with flat-ended 8 French polyethylene tubing. When the stent reached the end of the sheath, the polyethylene tubing was held while the sheath was withdrawn. This freed
40 the stent allowing it to expand and hug the vessel wall. In certain cases, stents were placed one inside another and/or one after another (Table I). Following placement, anglograms were made immediately, after one week, and then at monthly intervals to document stent position and vascular anatomy. The dogs were euthanized at the end of the study by exsanguination under deep Nembutal anesthesia, and a complete necropsy was performed.

45

50

55

EP 0 177 330 B1

TABLE I: Summary of vascular stent placement in five dogs.

Dog # (Wt)	Stent Size (Number Used)	Vascular Placement	Duration
5			
10			
15			
20			
25			
30			
35			
40			
45			
50			
55			
60			
65			
70			
75			
80			
85			
90			
95			
100			
105			
110			
115			
120			
125			
130			
135			
140			
145			
150			
155			
160			
165			
170			
175			
180			
185			
190			
195			
200			
205			
210			
215			
220			
225			
230			
235			
240			
245			
250			
255			
260			
265			
270			
275			
280			
285			
290			
295			
300			
305			
310			
315			
320			
325			
330			
335			
340			
345			
350			
355			
360			
365			
370			
375			
380			
385			
390			
395			
400			
405			
410			
415			
420			
425			
430			
435			
440			
445			
450			
455			
460			
465			
470			
475			
480			
485			
490			
495			
500			
505			
510			
515			
520			
525			
530			
535			
540			
545			
550			
555			
560			
565			
570			
575			
580			
585			
590			
595			
600			
605			
610			
615			
620			
625			
630			
635			
640			
645			
650			
655			
660			
665			
670			
675			
680			
685			
690			
695			
700			
705			
710			
715			
720			
725			
730			
735			
740			
745			
750			
755			
760			
765			
770			
775			
780			
785			
790			
795			
800			
805			
810			
815			
820			
825			
830			
835			
840			
845			
850			
855			
860			
865			
870			
875			
880			
885			
890			
895			
900			
905			
910			
915			
920			
925			
930			
935			
940			
945			
950			
955			
960			
965			
970			
975			
980			
985			
990			
995			
1000			

No difficulties were encountered in the placement of the endovascular stents. They were easy to use and could be placed one inside another and/or one after another. The expansile strength of the stents was found to be dependent on stent length, diameter of stent wires, the number of folds in the wire of each stent, and the number of stents placed one inside another. Specifically, expansile force increased with decreased length, increased stent wire diameter, increased number of wire folds, and increased number of

EP 0 177 330 B1

stents used.

Angiograms made of the stented vessels showed no flow defects, luminal narrowing, or occlusion. Blood vessels bridged by the stents remained patent and showed no indication of narrowing even after six months. No migration was noted with 29 of the 30 stents placed. One long stent (5.5 cm) placed alone in the inferior vena cava migrated approximately 2 cm cranially during the first week following placement, but no further movement occurred and no complications were encountered because of this migration.

Postmortem examinations showed the endothelial proliferation occurred around the stents where the wires contacted the vessel wall. By four weeks following placement, venous stents were almost completely (80%) covered by cell growth while aortic stents were just beginning (30%) to be incorporated. By 12 weeks, all stents were covered with endothelium where the wires contacted the vessel wall. No growth was noted on wire segments that bridged side branches even after 6 months. In addition, no erosion of the vascular walls was noted, and no clot formation was seen on any of the stents.

Percutaneous expandable endovascular stents can be made of various diameters and lengths from stainless steel wire formed in a zig-zag pattern. They are easy to place percutaneously in veins and arteries and do not require the use of ice water or hot saline as do nitinol coils (2, 3). The dilating force of the stent can be controlled by manipulation of wire size, number of wire folds, and stent length. Expansion force increases with larger wire, but so does the size of the collapsed stent which necessitates use of a larger sheath for placement. Increasing the number of wire folds and decreasing the stent length also increase the dilating force. Therefore, stainless steel vascular stents can be tailor-made with regard to length, diameter, and expansion force.

Multiple stents can be employed depending on the circumstance. If the vessel of interest is longer than one stent, several stents can be placed one after another with slight overlap at the ends. In addition, if the expansion strength of one stent is not sufficient, several stents can be placed one inside another to increase the dilating force at a specific point.

Following placement in a blood vessel, the stent gradually becomes incorporated into the vascular wall by endothelial proliferation around the wires where they contacted the wall. This is similar to what has been noted in other studies where metal wire has been placed in the vascular system (2, 3, 4). Radiographic studies indicated that by one week after placement of the stent, sufficient endothelial proliferation had occurred to prevent migration, but during this first week, displacement was possible although not probable. After being in place for one month, the venous stents were approximately 80% encased by endothelium while the aortic stents were only about 30% encased. This difference is probably due to the greater flow and pressure in the aorta. By three months, all stent wires contacting the vessel wall were completely encased in endothelium. This incorporation into the vascular wall reduces thrombogenicity (3), but no clot was found even on the bare wires after 6 months. No cell growth was noted on any of the wire segments not in contact with the vascular wall, e.g., where stents bridged side branches. This observation corresponds with previous reports on the use of endovascular stainless steel wires (4). Therefore, the stents can bridge other vessels without occluding them or producing luminal narrowing at the branch points. This has not been reported for other types of endovascular stents (2, 3). Thus it appears that the stainless steel stents can be placed anywhere in the vascular system that will accommodate them. No luminal narrowing was noted in the stented vessels even after six months. This differs from the nitinol endovascular stents which have been shown to produce luminal narrowing within 4 weeks due to fibrin deposition on the stent wires (1, 2, 3).

No clot formation was found on any of the stents at the time they were removed. This is similar to previously reported results (2, 3). No vascular erosion was seen probably because the vessels were normal and able to expand thus reducing the force of the stent wires against the vascular wall.

Results from this evaluation indicate that these stents should find various clinical applications. These may include re-establishment of flow in veins compressed by neighboring tumor (superior vena cava syndrome), maintenance of vascular patency after percutaneous balloon dilations, and correction of incomplete, long, irregular vascular stenosis. In addition, it may be possible to use these stents in other systems such as the respiratory, biliary, and urinary tracts to reinforce collapsing structures from extrinsic compression from neoplasm, maintain the dilatation of a balloon dilated segment of ureter, urethra, or bowel, aortic dissection, aortic aneurysm, and localization of a chronic puncture site.

Claims

1. A stent (9) comprising a single length of wire formed into a closed zig-zag configuration consisting of an endless series of straight sections (12) joined by a plurality of bends (13), wherein the stent is resiliently depressible into a smaller first shape in which all of the straight sections are arranged side-by-side and closely adjacent one another for insertion into a passageway with the bends having a

EP 0 177 330 B1

stress therein, and wherein the stent is resiliently expandable by release of said stress into a second shape in which all of the straight sections define a generally circular or cylindrical configuration for pressing against the wall of the passageway to maintain it open.

- 5 2. In combination, the stent of Claim 1 and a tubular cartridge (15) having said stent (9) therein, said stent being resiliently depressed into said smaller first shape.
3. The combination of Claim 2 additionally comprising a sheath (20) having a lumen therethrough, said sheath having an adapter recess arranged coaxially with said lumen and enlarged in size relative to said lumen, and flexible member (21) having a closed end and having an outer size sufficiently small to fit within said sheath yet sufficiently large to push said stent (9) out of said sheath.
- 10 4. The stent of Claim 1 wherein said wire is stainless steel of 0.046 cm (0.018 inches) O.D.
- 15 5. The stent of Claim 4 wherein said stent in its second shape is 5.5 cm long and 4 cm in diameter.
6. The stent of Claim 4 wherein said stent in its second shape is 3.0 cm long and 2.5 cm in diameter.
7. The stent of Claim 4 wherein said bends are relatively sharp and are at a radius of no more than 0.2 cm.
- 20

Revendications

1. Ecarteur (9) comprenant un seul tronçon de fil métallique ayant une configuration sinueuse fermée constitué d'une série sans fin de tronçons rectilignes (12) reliés par plusieurs coudes (13), l'écarteur pouvant être replié élastiquement à une première configuration de petite dimension dans laquelle tous les tronçons rectilignes sont placés côte à côte et très près les uns des autres afin que l'écarteur puisse être introduit dans un passage alors que les coudes sont soumis à une contrainte, l'écarteur pouvant se dilater élastiquement par suppression de la contrainte et prenant une seconde configuration dans laquelle tous les tronçons rectilignes délimitent une configuration circulaire ou cylindrique de façon générale afin que l'écarteur repousse la paroi du passage et maintienne celui-ci sous forme ouverte.
- 25 2. En combinaison, l'écarteur de la revendication 1 et une cartouche tubulaire (15) dans laquelle est placé l'écarteur (9), l'écarteur étant replié élastiquement à sa première configuration de petite dimension.
3. Combinaison selon la revendication 2, comprenant en outre une gaine (20) ayant une ouverture la gaine ayant une cavité d'adaptateur disposée coaxialement à l'ouverture et de dimension agrandie par rapport à la lumière, et un organe flexible (21) ayant une extrémité fermée et dont la dimension externe est suffisamment petite pour qu'il se loge dans la gaine mais suffisamment grande pour qu'il puisse repousser l'écarteur (9) en-dehors de la gaine.
- 40 4. Ecarteur selon la revendication 1, dans lequel le fil métallique est formé d'acier inoxydable et a un diamètre externe de 0,046 cm (0,018 pouce).
- 45 5. Ecarteur selon la revendication 4, dans lequel l'écarteur, lorsqu'il a sa seconde configuration, a une longueur de 5,5 cm et un diamètre de 4 cm.
6. Ecarteur selon la revendication 4, dans lequel, lorsqu'il a sa seconde configuration, l'écarteur a une longueur de 3,0 cm et un diamètre de 2,5 cm.
- 50 7. Ecarteur selon la revendication 4, dans lequel les coudes sont relativement aigus et ont un rayon qui ne dépasse pas 0,2 cm.

55 Ansprüche

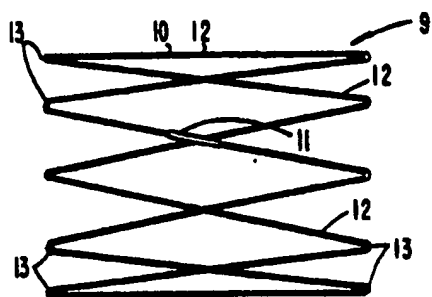

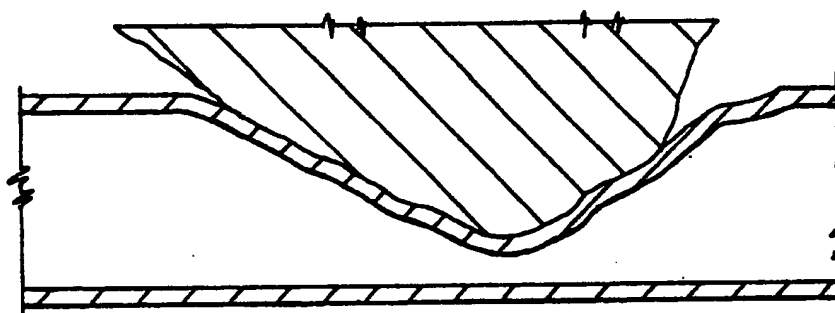
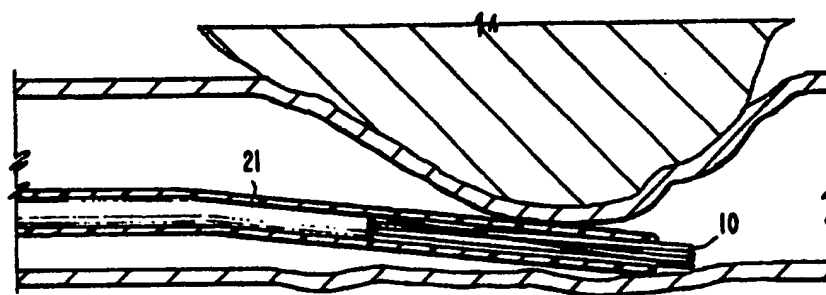
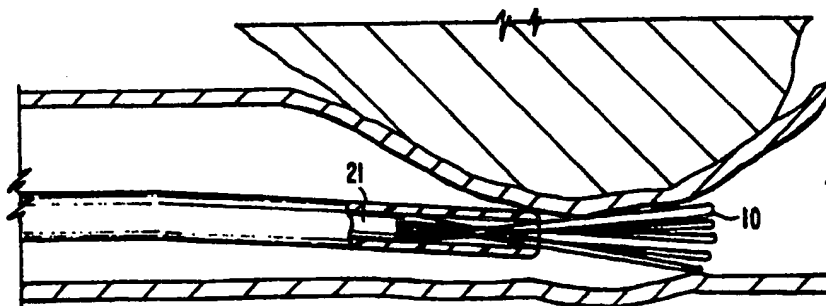
1. Stent (9) bzw. medizinisches Gerät zur Gefäßaufweitung, aufweisend ein Einzeldrahtstück, welches in eine geschlossene Zickzack-Gestalt geformt ist, die aus einer endlosen Aneinanderreihung von geraden

EP 0 177 330 B1

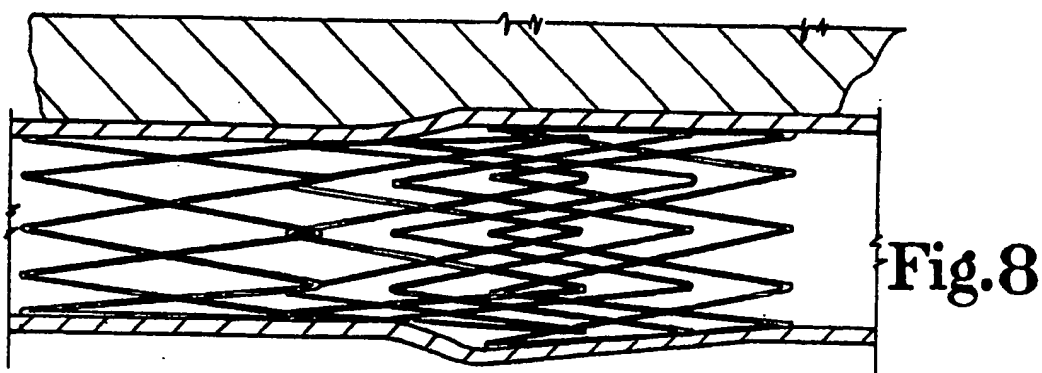
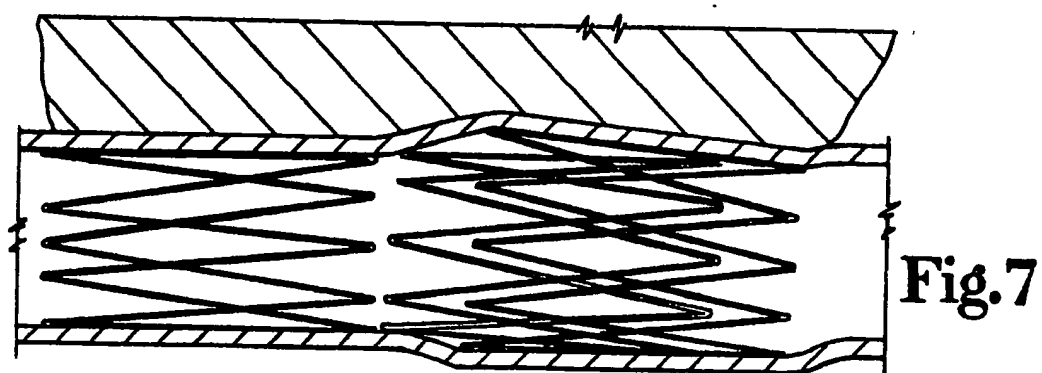
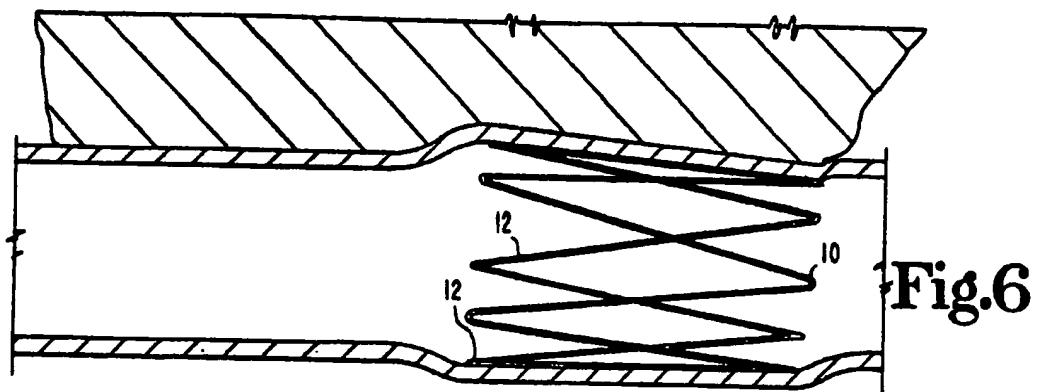
Abschnitten (12) gebildet ist, die über eine Mehrzahl von Biegungen oder Biegestellen (13) verbunden sind, wobei der Stent in eine erste, kleinere Gestalt nachgiebig zusammendrückbar ist, in welcher alle geraden Abschnitte zwecks Einführung in einen Durchgang seitlich nebeneinanderliegend und dicht zu einander benachbart angeordnet sind, wobei die Biegestellen unter Spannung stehen, und wobei der Stent durch Freigabe der Spannung in eine zweite Gestalt nachgiebig aufweitbar ausgebildet ist, in welcher alle geraden Abschnitte einen im wesentlichen kreisförmigen oder zylindrischen Aufbau zwecks Anpressung gegen die Wand des Durchganges festlegen, um diesen offen zu halten.

2. Kombination eines Stents nach Anspruch 1 und einer rohrförmigen den Stent (9) enthaltenden Patrone (15), wobei der Stent in seine erste, kleinere Gestalt elastisch zusammengedrückt ist.
3. Kombination nach Anspruch 2, zusätzlich aufweisend einen Mantel (20) mit einem durch ihn hindurchgehenden Durchgang, wobei der Mantel eine Adapterausnehmung aufweist, die koaxial zu dem Durchgang und in ihrer Größe im Vergleich zum Durchgang größer ausgebildet ist, und aufweisend einen flexiblen Teil (21), der ein abgeschlossenes Ende und eine äußere Größe aufweist, die ausreichend klein, damit er in den Mantel paßt, jedoch ausreichend groß ist, um den Stent (9) aus dem Mantel herauszustoßen.
4. Stent nach Anspruch 1, dadurch gekennzeichnet, daß der Draht aus rostfreiem Stahl mit einem Durchmesser von 0,046 cm (0,018 inches) besteht.
5. Stent nach Anspruch 4, dadurch gekennzeichnet, daß der Stent in seiner zweiten Gestalt 5,5 cm lang ist und einen Durchmesser von 4 cm hat.
6. Stent nach Anspruch 4, dadurch gekennzeichnet, daß der Stent in seiner zweiten Gestalt 3 cm lang ist und einen Durchmesser von 2,5 cm hat.
7. Stent nach Anspruch 4, dadurch gekennzeichnet, daß die Biegestellen relativ spitzwinklig ausgebildet sind und einen Radius von nicht mehr als 0,2 cm aufweisen.

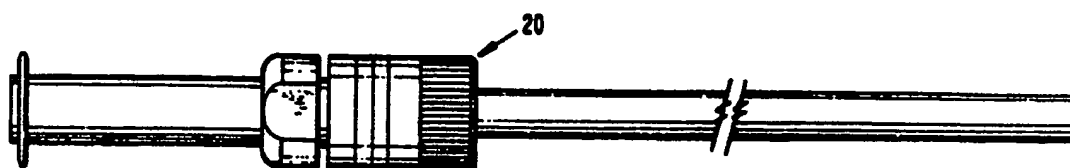
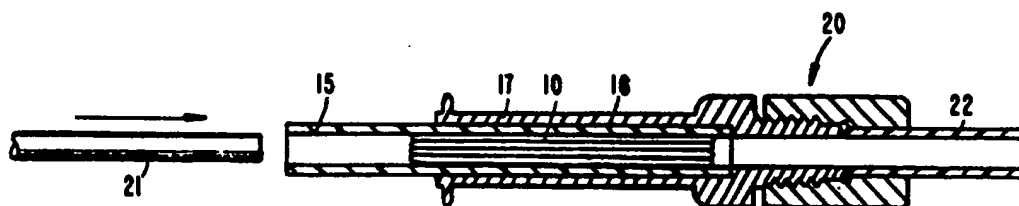
EP 0 177 330 B1

**Fig.1****Fig.2****Fig.3****Fig.4****Fig.5**

EP 0 177 330 B1



EP 0 177 330 B1

**Fig. 9****Fig. 10**

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.